
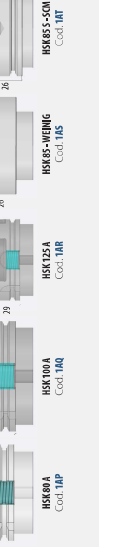
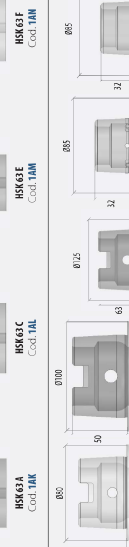
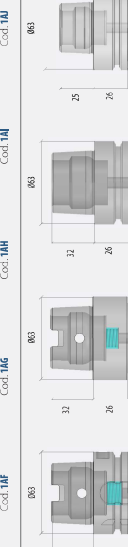
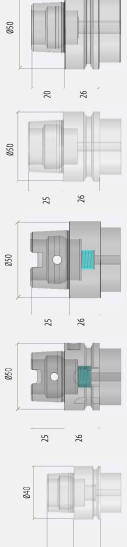


Part codes for available HSK CONNECTIONS*

To configure your toolholder you need to choose one of the following connections first.

*See page 69 for the complete list of EN manufacturing rules.

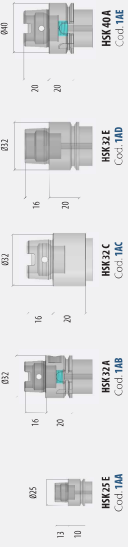

Hydro Chucks

Ideal for gearmilling, milling and drilling operations. Hydro chucks combine the best of all high range-clamping systems, providing exceptional concentricity features and ease of set-up.



Partcode	Description	D	d	L	L1	Connection	Balancing (RPM)
AM00	hydrochuck	30	10	90	65	HSK32A-E	50.000
AM00	hydrochuck	30	10	90	65	HSK40A-E	24.000
AM01	hydrochuck	32	12	95	70	HSK40A-E	24.000
AM02	hydrochuck	32	12	100	64	HSK50A-E-F	24.000
AM03	hydrochuck	32	12	85	65	HSK63A-E-F	24.000
AM04	hydrochuck	38	16	95	69	HSK50A-E-F	24.000
AM04	hydrochuck	38	16	95	69	HSK63A-E-F	24.000
AM04	hydrochuck	38	16	95	69	HSK80A	18.000
AM05	hydrochuck	38	16	95	66	HSK100A	18.000
AM06	hydrochuck	42	20	95	69	HSK63A-C-E-F	18.000
AM07	hydrochuck	42	20	95	66	HSK80A	18.000
AM07	hydrochuck	42	20	95	66	HSK100A	18.000
AM08	hydrochuck	52	25	120	94	HSK63A-C-E-F	18.000
AM08	hydrochuck	52	25	120	94	HSK80A	18.000
AM09	hydrochuck	52	25	120	91	HSK100A	18.000
AM10	hydrochuck	60	32	120	94	HSK63A-C-E-F	18.000
AM10	hydrochuck	60	32	120	94	HSK80A	18.000
AM11	hydrochuck	60	32	120	91	HSK100A	18.000
AM11	hydrochuck	60	32	120	91	HSK125A	18.000
AM12	hydrochuck	80	3/8"	100	59	HSK50A-E-F	18.000
AM13	hydrochuck	80	3/8"	80	59	HSK63A-E-F	18.000
AM14	hydrochuck	32	1/2"	85	64	HSK63A-E-F	18.000



Partcode	Description	D	d	L	L1	Connection	Balancing (RPM)
AM15	hydrochuck	32	1/2"	90	64	HSK80A	18.000
AM16	hydrochuck	32	1/2"	90	61	HSK100A	18.000
AM17	hydrochuck	42	3/4"	95	69	HSK63A-E-F	18.000
AM18	hydrochuck	42	3/4"	95	70	HSK80A	18.000
AM19	hydrochuck	42	3/4"	95	68	HSK100A	18.000
AM20	hydrochuck	52	1"	120	94	HSK63A-E-F	18.000
AM20	hydrochuck	52	1"	120	94	HSK80A	18.000
AM21	hydrochuck	52	1"	120	91	HSK100A	18.000

MANUFACTURING MATERIAL

