


Part codes for available HSK CONNECTIONS\*

To configure your toolholder you need to choose one of the following connections first.

\*See page 69 for the complete list of EN manufacturing rules.

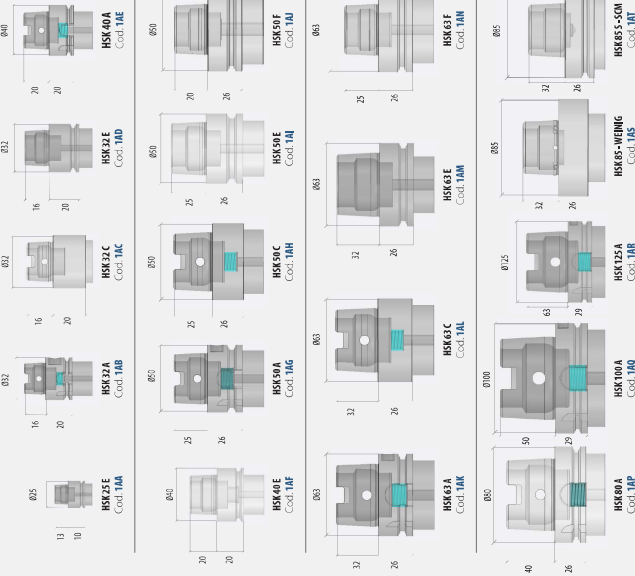

HSK TOOL HOLDERS DIN 69893

Twister Hydro with adjustable height

Twister technology combines with the hydraulic clamping system for effective wood chips suction and excellent cutting precision.



page 163

page 223



Partcode	Description	D	d	L	L1	L2	Connection	Balancing (RPM)
AN00	TwisterHydroRH	98	10	101	65	21	HSK 63 EF	24.000
AN01	TwisterHydroRH	98	12	106	65	21	HSK 63 EF	24.000
AN02	TwisterHydroRH	98	16	116	59	21	HSK 63 EF	24.000
AN03	TwisterHydroRH	98	20	116	59	21	HSK 63 EF	24.000
AN04	TwisterHydroRH	98	25	141	70	21	HSK 63 EF	24.000
AN05	TwisterHydroRH	98	32	141	64	21	HSK 63 EF	24.000
AN06	TwisterHydroRH	98	3/8"	101	65	21	HSK 63 EF	24.000
AN07	TwisterHydroRH	98	1/2"	106	65	21	HSK 63 EF	24.000
AN08	TwisterHydroRH	98	3/4"	116	59	21	HSK 63 EF	24.000

PARTS OF YOUR BUSINESS



Partcode	Description	D	d	L	L1	L2	Connection	Balancing (RPM)
AP00	TwisterHydroLH	98	10	101	65	21	HSK 63 EF	24.000
AP01	TwisterHydroLH	98	12	106	65	21	HSK 63 EF	24.000
AP02	TwisterHydroLH	98	16	116	59	21	HSK 63 EF	24.000
AP03	TwisterHydroLH	98	20	116	59	21	HSK 63 EF	24.000
AP04	TwisterHydroLH	98	25	141	70	21	HSK 63 EF	24.000
AP05	TwisterHydroLH	98	32	141	64	21	HSK 63 EF	24.000
AP06	TwisterHydroLH	98	3/8"	101	65	21	HSK 63 EF	24.000
AP07	TwisterHydroLH	98	1/2"	106	65	21	HSK 63 EF	24.000
AP08	TwisterHydroLH	98	3/4"	116	59	21	HSK 63 EF	24.000

MANUFACTURING MATERIAL

