SK
BT
CAT

Part codes for available SK/BT/CAT CONNECTIONS*

To configure your toolholder you need to choose one of the following connections first.

*See page 69 for the complete list of DIN manufacturing rules.

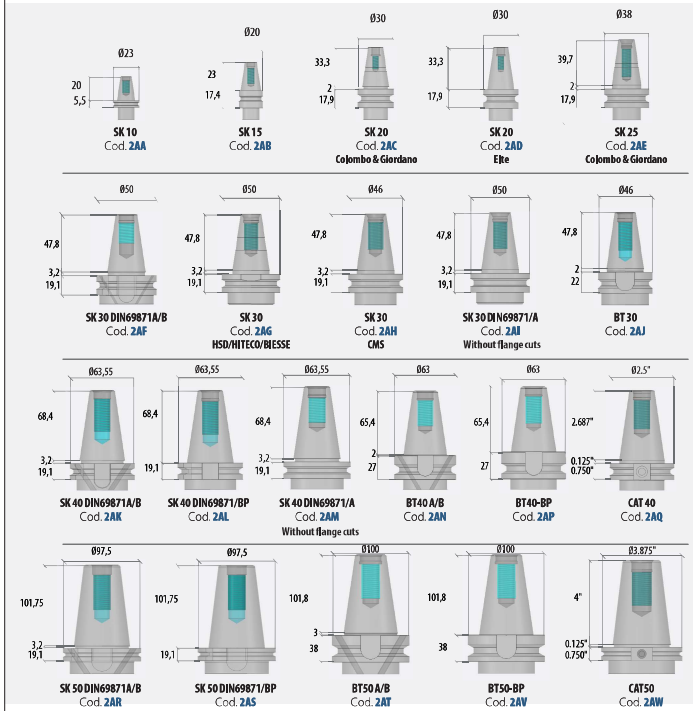

SK
BT
CAT

TOOL HOLDERS SK/BT/CAT

Morse Cone Reductions DIN 228

Reduction system for the use of bits and mills in lathes and machines equipped with morse cones.

page 200 page 163 page 223

Part code	Description	D	L	CM	Connection	Balancing (RPM)
KY00	morse cone reduction	35	60	1 P+F	SK 30 DIN 69871A/B	15.000
KY00	morse cone reduction	35	60	1 P+F	BT 30	15.000
KY01	morse cone reduction	35	70	1 P+F	SK 40 DIN 69871A/B	15.000
KY01	morse cone reduction	35	70	1 P+F	BT 40A/B	15.000
KY02	morse cone reduction	35	60	2 P+F	SK 30 DIN 69871A/B	15.000
KY02	morse cone reduction	35	60	2 P+F	BT 30	15.000
KY03	morse cone reduction	35	70	2 P+F	SK 40 DIN 69871A/B	15.000
KY03	morse cone reduction	35	70	2 P+F	SK 40 DIN 69871/BP	15.000
KY03	morse cone reduction	35	70	2 P+F	BT 40A/B	15.000
KY03	morse cone reduction	35	70	2 P+F	BT 40/BP	15.000
KY03	morse cone reduction	35	70	2 P+F	CAT 40	15.000
KY04	morse cone reduction	35	65	2 P+F	SK 50 DIN 69871A/B	15.000
KY04	morse cone reduction	35	65	2 P+F	BT 50A/B	15.000
KY04	morse cone reduction	35	65	2 P+F	CAT 50	15.000
KY05	morse cone reduction	42	90	3 P+F	SK 40 DIN 69871A/B	15.000
KY05	morse cone reduction	42	90	3 P+F	SK 40 DIN 69871/BP	15.000
KY05	morse cone reduction	42	90	3 P+F	BT 40A/B	15.000
KY05	morse cone reduction	42	90	3 P+F	BT 40/BP	15.000
KY05	morse cone reduction	42	90	3 P+F	CAT 40	15.000
KY06	morse cone reduction	42	70	3 P+F	SK 50 DIN 69871A/B	15.000
KY06	morse cone reduction	42	70	3 P+F	BT 50A/B	15.000
KY06	morse cone reduction	42	70	3 P+F	CAT 50	15.000
KY07	morse cone reduction	52	110	4 P+F	SK 40 DIN 69871A/B	15.000

Part code	Description	D	L	CM	Connection	Balancing (RPM)
KY07	morse cone reduction	52	110	4 P+F	SK 40 DIN 69871/BP	15.000
KY07	morse cone reduction	52	110	4 P+F	BT 40A/B	15.000
KY07	morse cone reduction	52	110	4 P+F	BT 40/BP	15.000
KY07	morse cone reduction	52	110	4 P+F	CAT 40	15.000
KY08	morse cone reduction	52	85	4 P+F	SK 50 DIN 69871A/B	15.000
KY08	morse cone reduction	52	85	4 P+F	BT 50A/B	15.000
KY08	morse cone reduction	52	85	4 P+F	CAT 50	15.000
KY09	morse cone reduction	70	108	5 P+F	SK 50 DIN 69871A/B	15.000
KY09	morse cone reduction	70	108	5 P+F	BT 50A/B	15.000
KY09	morse cone reduction	70	108	5 P+F	CAT 50	15.000

MANUFACTURING MATERIAL

STEEL