


Part codes for available HSK CONNECTIONS*

To configure your toolholder you need to choose one of the following connections first.

*See page 69 for the complete list of EN manufacturing rules.

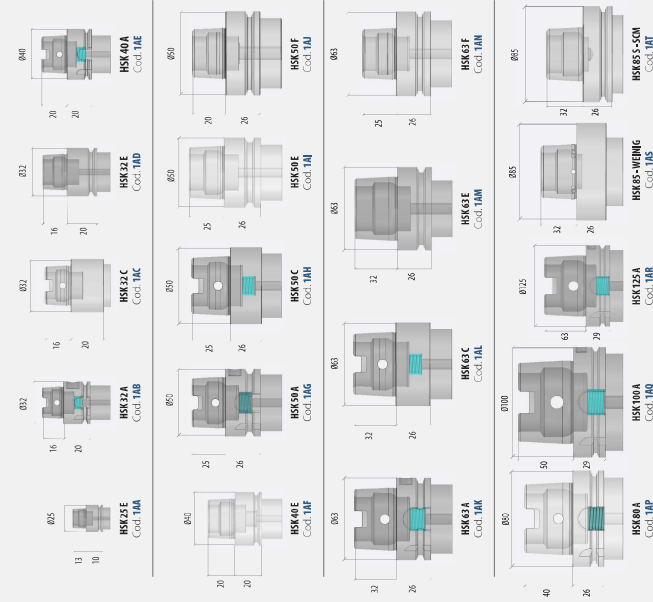

HSK TOOL HOLDERS DIN 69893

Drill Chucks

Drill chucks are an effective system for low speed boring, milling and generic cut operations.



| Part code | Description | d | D | L | Connection | Balancing (RPM) |
|-----------|-------------|------|----|-----|------------|-----------------|
| A000 | drillchuck | 0-13 | 50 | 130 | HSK50A-E-F | 18.000 |
| A000 | drillchuck | 0-13 | 50 | 130 | HSK63A-E-F | 18.000 |
| A000 | drillchuck | 0-13 | 50 | 130 | HSK80A | 18.000 |
| A000 | drillchuck | 0-13 | 50 | 130 | HSK100A | 18.000 |
| A001 | drillchuck | 0-16 | 57 | 140 | HSK63A-E-F | 18.000 |
| A001 | drillchuck | 0-16 | 57 | 140 | HSK80A | 18.000 |
| A001 | drillchuck | 0-16 | 57 | 140 | HSK100A | 18.000 |
| A001 | drillchuck | 0-16 | 57 | 140 | HSK125A | 18.000 |

PARTS OF YOUR BUSINESS



• MANUFACTURING MATERIAL

